

Digistat+

Wired Room Thermostat

Drayton's stylish Digistat+ with tactile, audible & visual feedback. Featuring a familiar dial control with a digital display to show that the temperature has been set accurately every time.


The product can be configured with a minimum temperature setting to protect the vulnerable.



Digistat+ / +RF features:

- Conventional dial adjustment
- TPI Control
- Tactile dial
- 1°C setting steps
- Tactile & audible feedback via click of the dial
- Visual feedback via digital display
- Set-back feature
- Min/Max temperature setting
- Tamper-proof (set Min/Max the same)
- Battery powered
- Digital display situated above dial for ease of reading

Wiring:

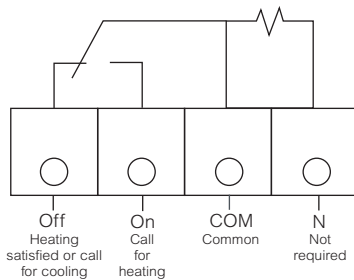

FOR FIXED WIRING ONLY

Digistat+

Product	Part No.
Digistat+	30002

Getting Technical

Model	Digistat+
Power supply:	2 X 1.5V IEC LR6(AA) alkaline batteries
Switch type & rating:	SPDT 2(1)A 12-230V a.c./d.c. Volt free
Wiring:	Designed for fixed wiring only, to comply with current IET wiring regulations (BS7671).
Mounting:	Suitable for surface or conduit box mounting
Battery life:	2 years typical
Ambient temperature:	Operating 0°C to 40°C / Storage -20°C to 55°C
Ambient humidity (non condensing):	Operating 25% to 90% / Storage 15% - 95%
Temperature range:	5 to 30°C
Temperature resolution:	1.0°C
Control accuracy:	+ 0.5K @ 20°C
Control algorithm:	TPI, TP
Ball pressure test:	75°C
Pollution degree:	2
Energy class:	IV = 2% (Acc. EU 811/2013, 812/2013, 813/2013, 814/2013)
Relevant directives:	2014/35/EU Low Voltage Directive 2014/30/EU Electromagnetic Compatibility Directive 2006/66/EC Batteries Directive 2011/65/EU RoHS Directive
Applied standards:	EN60730-1; EN60730-2-9